

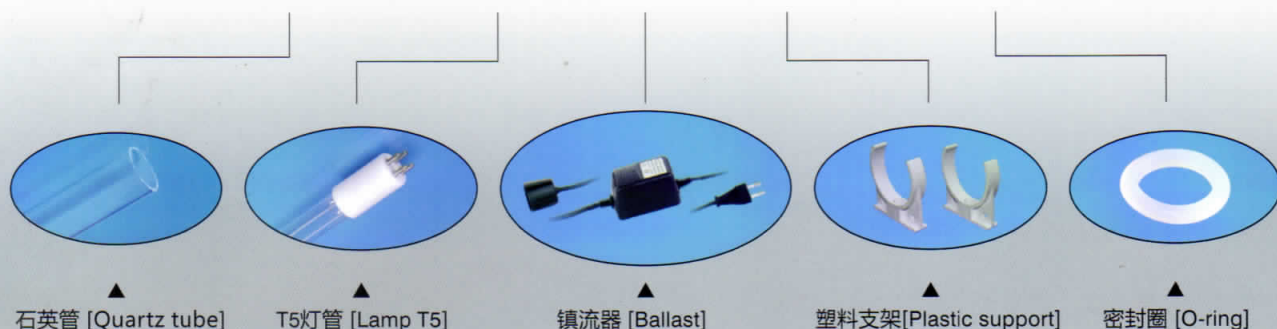


> 不锈钢紫外线杀菌器
> 应用于家庭住宅、商务会所的水杀菌设备
> SDE系列
Stainless Steel UV Sterilizer>Water Disinfection System Applying in Residential Building and Business Office>SDE Series




Ultraviolet (UV-C rays/253.7nm) water disinfection system is a unique and fast method of water sterilization to effectively destroy bacteria, viruses, molds and algae.

型 号 Model	SDE/1P-4D-T5215	SDE/1P-4D-T5287	SDE/1P-4D-T5345
外壳材料 Housing material	304SS	304SS	304SS
T5灯管功率 All UV lamp (T5)power	6W	12W	16W
输入电压 Input voltage	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz
总消耗功率 Total consumed power	8W	16W	21W
灯管数量 UV lamp quantity	1	1	1
流 量 Water treatment capability	0.5GPM (0.1M ³ /Hr)	1GPM (0.2M ³ /Hr)	2GPM (0.4M ³ /Hr)
容 积 Water capacity	421cm ³	502cm ³	990cm ³
最大操作压力 Max operating pressure	10bar(145psi)	10bar(145psi)	10bar(145psi)
测试压力 Test pressure	15bar(218psi)	15bar(218psi)	15bar(218psi)
故障报警 Lamp failure alarm	可选 Optional	可选 Optional	可选 Optional
灯管使用寿命 Lamp life	8000Hrs	8000Hrs	8000Hrs
产品尺寸 Product size 	A	270mm	310mm
	B	63mm	63mm
	G	1/4" female	1/4" female
	Ø	50.8mm	50.8mm
包装数据 Carton size/pcs	50*37.5*45cm/12pcs	50*37.5*45cm/12pcs	46*45*47cm/18pcs
毛 重 G.W.	10kgs	12kgs	21kgs

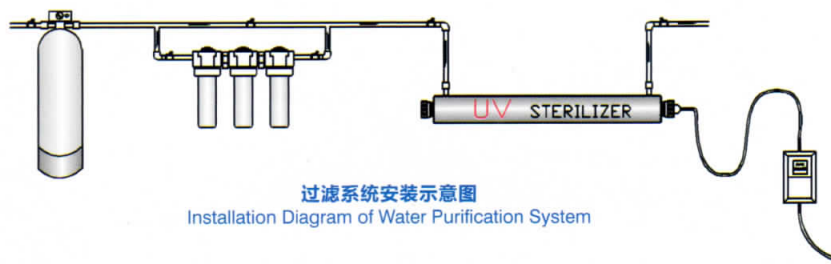

实物图 End product



功能: 不锈钢紫外线杀菌器是被广泛应用于水源末端杀菌、消毒的净化设备, 可有效杀死水中的细菌, 病毒, 霉菌等微生物, 杀菌率达99.99%, 健康、环保, 不含任何化学物质, 产品材质符合欧盟环保标准。

特点: 简易, 经济, 高效, 安全, 无二次污染

适用范围: 家庭饮用水, 公共用水, 食品工业用水等

安装使用前请详细阅读使用说明书。

Functions: Stainless steel UV sterilizer is a widely used water disinfection and purification system which can effectively disinfect bacteria, viruses and molds etc. (better effect after water purifier). The sterilizing rate is as high as 99.99%. The stainless steel meets EU environmental standard, healthy, environmental protecting and no harmful chemical substance include.

Features: easy, economical, fast, safe, no secondary pollution

Applications: drinking water, public places, food processing etc.

Please read owner's manual carefully before beginning installation or operation.

SDE/1P-4D-T5565	SDE/1P-4D-T5885	SDE/1P-4D-T5925	SDE/1P-4D-T5925L
304SS	304SS	304SS	304SS
25W	30W	35W	55W
110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz	110V/240V 50/60Hz
32W	40W	46W	72W
1	1	1	1
6GPM (1.4M ³ /Hr)	8GPM (1.8M ³ /Hr)	10GPM (2.3M ³ /Hr)	12GPM (2.7M ³ /Hr)
1687cm ³	2684cm ³	2810cm ³	2810cm ³
10bar(145psi)	10bar(145psi)	10bar(145psi)	10bar(145psi)
15bar(218psi)	15bar(218psi)	15bar(218psi)	15bar(218psi)
可选 Optional	可选 Optional	可选 Optional	可选 Optional
8000Hrs	8000Hrs	8000Hrs	8000Hrs
595mm	910mm	950mm	950mm
82mm	85mm	85mm	85mm
1/2" male	3/4" male	3/4" male	3/4" male
63.5mm	63.5mm	63.5mm	63.5mm
68*31*50cm/12pcs	108*31*32cm/8pcs	108*31*32cm/8pcs	108*31*32cm/8pcs
21kgs	18kgs	21kgs	21kgs

请注意:

- 以上不锈钢外壳可配飞利浦灯管。
- 不锈钢外壳尺寸可根据客户要求定做。
- 不锈钢材料可选择316SS。
- 不锈钢管内孔处理可选择: 机械抛光、电解抛光。

Note:

- Philips lamps are optional.
- Customization is acceptable.
- 316SS is optional.
- Internal mechanical or electrolytic polishing is optional for stainless steel tube.

RoHS

